
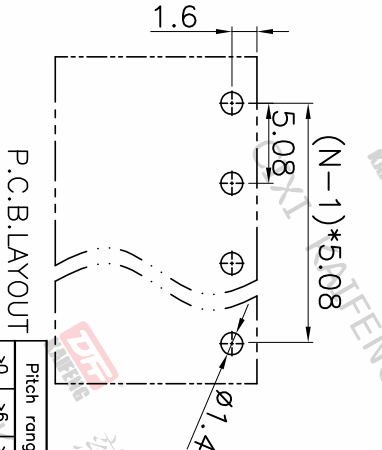
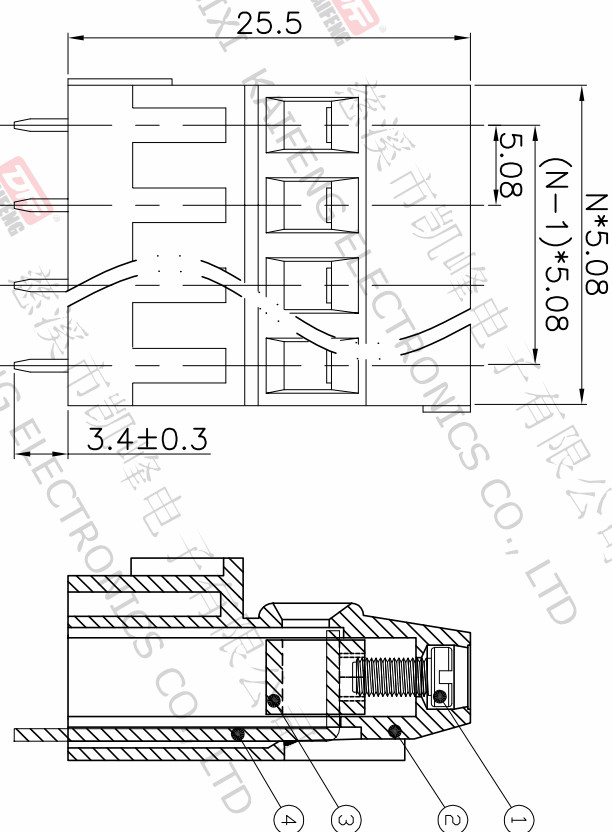


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.19	DENG	JIN



- Material  
 ØScrews : M3.0 steel, Zinc plated,  
 ↳ slot type  
 ØHousing : PA66, UL94V-0  
 ØClamp : Copper alloy, Ni plated  
 ØPin header : Copper alloy, Tin plated

- Electrical  
 UL IEC  
 Rated voltage : 300V 250V  
 Rated current : 15A 24A  
 Contact Resistance: 20mΩ


- Insulation resistance: 500MΩ/DC500V  
 Withstanding Voltage : AC2000V/1min  
 Wire range: 24-14AWG 2.5mm<sup>2</sup>

- Mechanical  
 Operating temperature: -40°C ~ +105°C  
 Soldering temperature: 250°C ±5 / 5sec  
 Torque: 0.5N.m (4.43Lb.in)  
 Strip length: 6-7mm

- RoHS compliance

HOW TO ORDER

KF128G-5.08-XXP-1 X-XXXXX

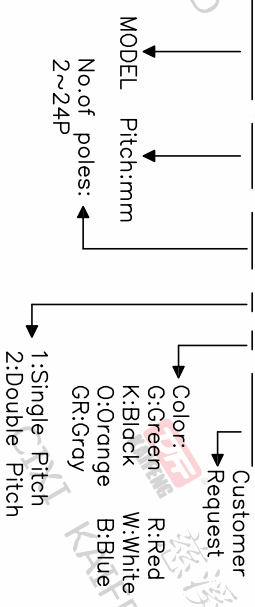

Pitch range	Nominal dimension range	0.1/10	±2°
>0	>0	0.1/10	±2°
~6	>30	0.1/10	±2°
~10	~60	0.1/10	±2°
~24	~100	0.1/10	±2°
~30	~150	0.1/10	±2°
±0.15	±0.30	±0.50	±1.30

PROJECTION	UNIT	TITLE
⊕	mm	KF128G-5.08-XXP-1X
⊕	A4	SHEET SIZE
⊕	A4	SERIES

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W15000522

**DFE** 慈溪市凯峰电子有限公司  
 CIXI KAIFENG ELECTRONICS CO.,LTD