

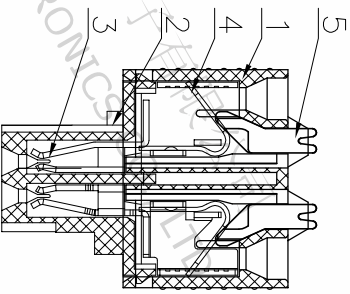
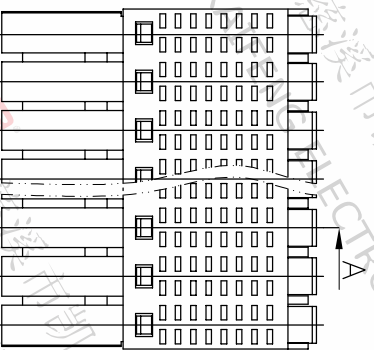
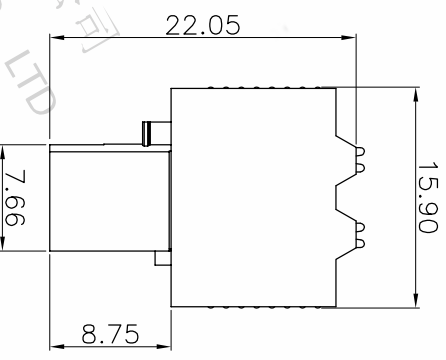


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.5.19	ZHANG	JIN

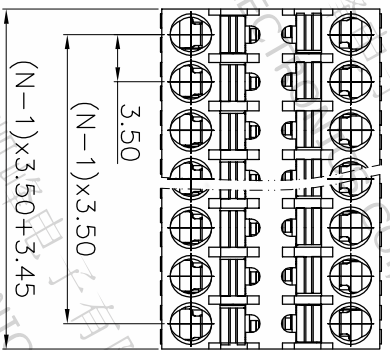


SECTION A-A

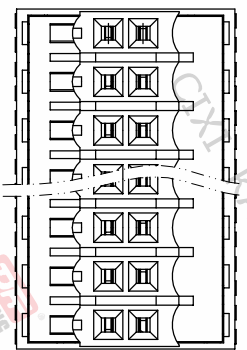

- Material
 - ⊙Housing : PA66, UL94V-0
 - ⊙Cover : PA66, UL94V-0
 - ⊙Contact : Copper alloy, Tin plated
 - ⊙Reed : Stainless steel
 - ⊙Button : PA66, UL94V-0
- Electrical

UL	IEC
Rated voltage : 300V	320V
Rated current : 10A	13.4A
- Mechanical
 - Operating temperature: -40°C ~ +105°C
 - Soldering temperature: 250°C ± 5 / 5sec
 - Strip length: 7-8mm
- RoHS compliance

HOW TO ORDER
 KF12ED-3.5-2*XXP-1 X-XXXXX

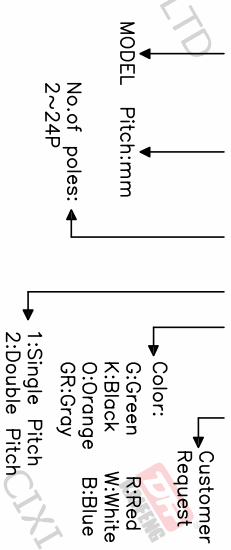

Pitch range	Nominal dimension range	PROJECTION
>0	>30	0.1/10
~6	~60	0.1/10
~10	~100	0.1/10
~24	~150	0.1/10
±0.15	±0.30	±2°
±0.20	±0.50	±2°
±0.30	±0.70	±2°
±1.00	±1.30	±2°

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W10000982

PROJECTION	TITLE
UNIT	KF12ED-3.5-2*XXP-1X
SHEET SIZE	A4
SERIES	KF12ED

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD