

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.6.02	ZHANG	JIN






- Material
 ØHousing : PA66, UL94V-0
 ØPin header : Copper alloy, Tin plated
 ØCover : PA66, UL94V-0

- Electrical
 UL IEC
 Rated voltage : 150V 130V
 Rated current : 5A 10A
 Contact resistance : 20mΩ(Max)
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC1250V/1min

- Mechanical
 Operating temperature: -40°C ~ +105°C
 Soldering temperature: 250°C±5/5sec

• RoHS compliance

HOW TO ORDER
 KF12EZRH-2.5-2*XXP-1 X-XXXXX

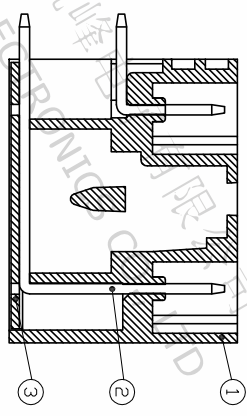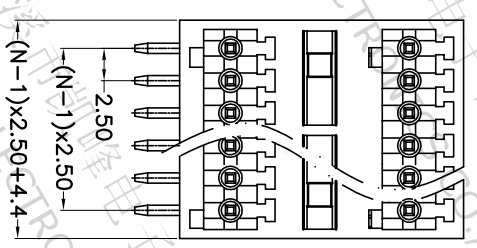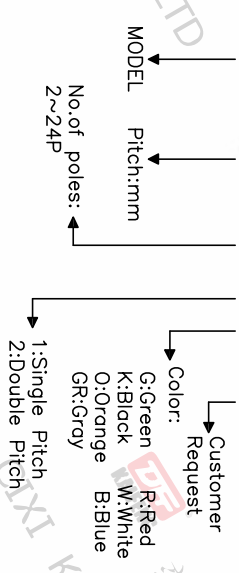

P.C.B. LAYOUT

Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE
>0	>0	0.1/10	mm	KF12EZRH-2.5-2*XXP-1X
~6	~30			
~10	~60			
~24	~100			
~30	~150			
±0.15	±0.30	±2°		
±0.20	±0.50			
±0.30	±0.70			
±1.00	±1.30			

DRAWING TYPE	CUSTOMER DRAWING
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	W10001542

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD