



REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.6.02	ZHANG	JIN

- Material
 @Housing : PAg6, UL94V-0
 @Pin header : Copper alloy, Tin plated


- Electrical
 UL IEC
 Rated voltage : 300V 320V
 Rated current : 15A 20A
 Contact resistance : 20mΩ(Max)
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC2000V/1min

- Mechanical
 Operating temperature: -40°C ~ +105°C
 Soldering temperature: 250°C ± 5 / 5sec
- RoHS compliance

HOW TO ORDER
 KF2EDGCR-X-5.0-XXP-1 X-XXXXX

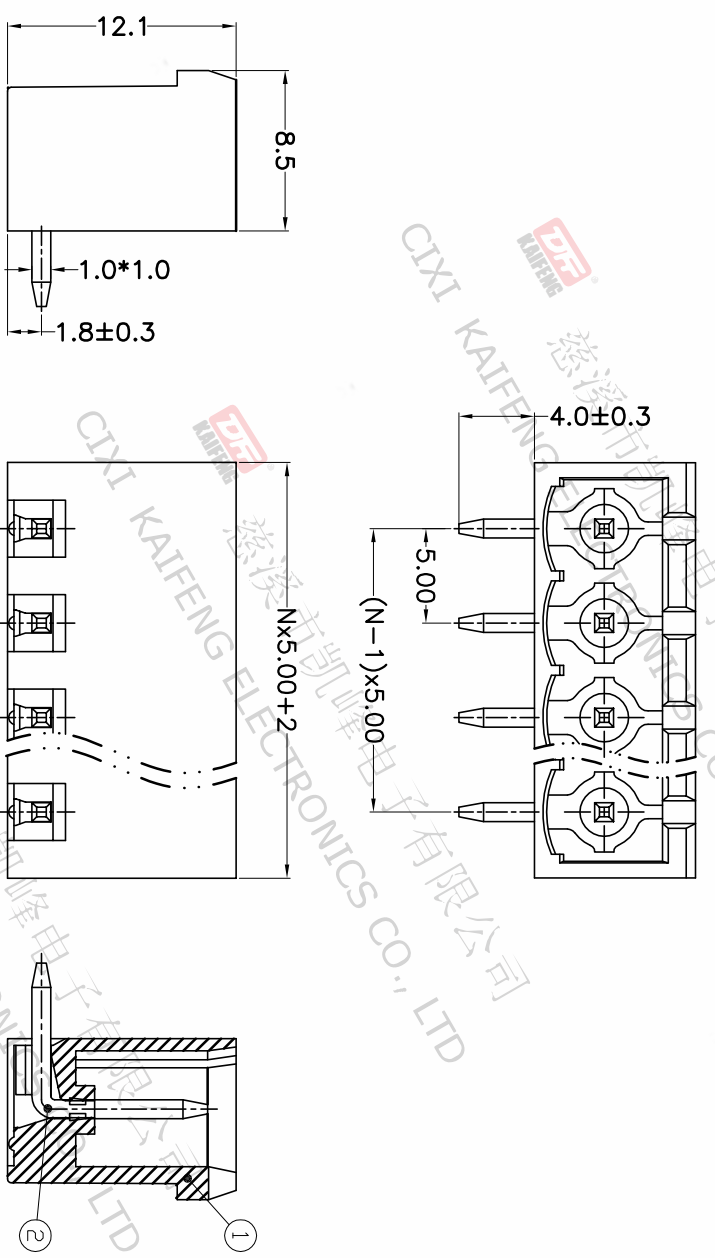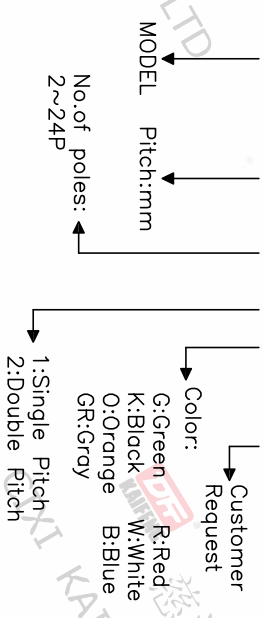

P.C.B.LAYOUT

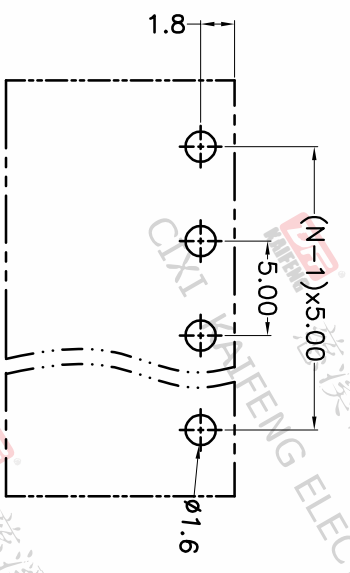

Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE
>0	>0	0.1/10	mm	KF2EDGCR-X-5.0-XXP-1X
>6	>30			
~	~			
6	30			
10	60			
24	100			
	150			
	>150			
±0.15	±0.30			
±0.20	±0.50			
±0.30	±0.70			
	±1.00			
	±1.30			
	±2			

DFE 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD

DRAWING TYPE: CUSTOMER DRAWING
 SCALE: 1:1 SHEET: 1 OF 1
 DRAWING NO.: W100000682